High Volume Water Flows Done Safely . . .



Crossfire Portable Monitor with Twin Inlet

. . . REALLY !

With a flow rating of 1250 gpm in portable operation, the TFT Crossfire monitor integrates the exclusive Safe-Tak safety shutoff system to prevent unintentional movement.

The monitor's compact and lightweight design includes stainless spring steel legs with carbide tips for maximum stability, and a visual attachment indicator for additional security.

To learn more about how you can provide maximum flows and improved crew safety during initial attack operations, contact your local TFT dealer today.

FOREMOST

TASK FORCE TIPS
FIRE FIGHTING EQUIPMENT

TASK FORCE TIPS
Made in USA • www.tft.com

3701 Innovation Way, Valparaiso, IN 46383-9327 USA
US & CN 800.348.2686 • 1.219.462.6161 • fax 1.219.464.7155

© Copyright Task Force Tips, Inc. 2014

TASK FORCE TIPS
FIRE FIGHTING EQUIPMENT

U.S. & Canada 800.348.2686 www.tft.com
24 Hour Service Team: 800.854.6864

TASK FORCE TIPS 3701 INNOVATION WAY, VALPARAISO, IN 46383-9327 MADE IN USA




Shown here, XFC-32 Crossfire Monitor package with Safe-Tak 1250 Portable Base and Safe-Tak Valve. Package includes your choice of Master Stream 1000 or 1250S series nozzle.

CROSSFIRE SERIES VIDEO
Visit www.tft/FE9 to view a complete video.

CROSSFIRE® SERIES

The CROSSFIRE monitor is the most versatile master stream appliance ever offered to the fire service. Its lightweight, compact design and unique quick-release swivel joint allow for a faster and safer stream deployment in the portable attack mode. The Safe-Tak 1250 utilizes the revolutionary, patented Safe-Tak "flow safety valve." Should the monitor lose contact with the ground surface, the Safe-Tak will automatically reduce flow to the monitor. This safety feature reduces the risk of injury from an out-of-control appliance. Monitor top and base are hardcoat anodized aluminum with a powder coat finish inside and out.

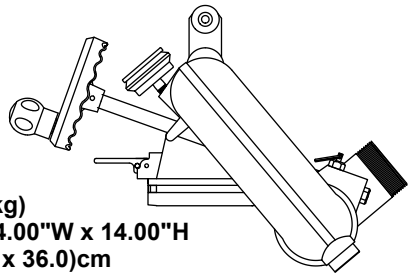


XFT-NJ
17.0 lb (7.5kg)
22.00"L x 14.00"W x 14.00"H
(56.0 x 36.0 x 36.0)cm

XFT-NJ CROSSFIRE MONITOR TOP 2.5"NH (65mm) OUTLET can be connected to either a portable base or a truck with the adapters on page 79 or a TFT Extend-A-Gun with XL outlet on page 80. The connection is easy, positive, and visually verified. When in use, the release is "locked out" by water pressure. The waterway is a large 3.25" (83mm) which lets the CROSSFIRE deliver up to 1250 gpm (4500 l/min) with low friction loss. Horizontal rotation is securely locked with a simple lever, and position can be visually confirmed. Only seven (7) turns of the handwheel change the discharge elbow from vertical to the stop elevation. Includes highly visible pressure gauge and built-in automatic drain valve. Standard outlet thread is male 2.5" NH (65mm).


SAFE-TAK 1250™

Portable Base With Safety Valve

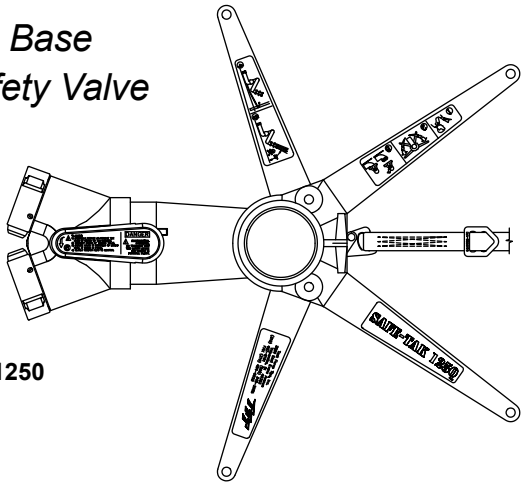


SAFE-TAK 1250
XFH**


SAFE-TAK 1250 PORTABLE BASE WITH SAFE-TAK VALVE is supplied with either two clappered swivel inlets or with a single full-time swivel inlet. The stainless steel, carbide-tipped base support legs can be folded to easily fit inside a small apparatus compartment, or for carrying pre connected to a hose line. Includes a safety tie-down strap with attached storage cap.

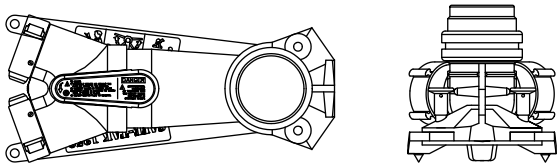

Legs Fold Completely for Easy Storage.

FLOW SAFETY VALVE

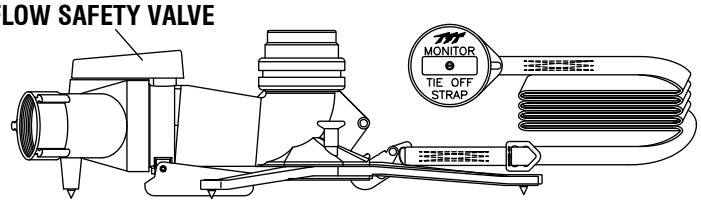

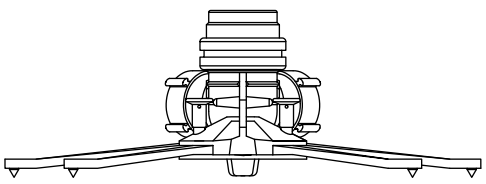

STOW-A-WAY 800
XFL**

The STOW-A-WAY 800 PORTABLE BASE WITHOUT SAFE-TAK VALVE is supplied with either two clappered swivel inlets or with a single full-time swivel inlet. Includes a safety tie-down strap with attached storage cap. STOW-A-WAY 800 portable base is not equipped with SAFE-TAK™ "Flow Safety Valve." Maximum recommended flow with Stow-A-Way Base in portable mode is 800 gpm (3500 l/min). Order XF500-KIT Option $500.00 to add a flow safety valve. Weight of safety valve is 3.1 lb (1.4kg).

Task Force Tips

SKU: XFC-322BICJ3

CrossFire Portable Monitor +MasterStream 4000 Selectable Nozzle Package - Dual 65 mm BICM Swivel Inlets, 65 mm BSPM Rigid Outlet, Storage Bracket

Your Complete Firefighting Monitor Package

Categories: Portable Monitors

CrossFire® Monitor Packages deliver a complete setup with smooth bore, selectable, or automatic nozzles and multiple connection options. Engineered for maximum adaptability, each package is designed to handle demanding firefighting scenarios with flows up to 1250 GPM (4500 LPM). Safety features ensure secure and efficient operation.

Key Features :

- **Comprehensive Package** : Includes monitor top, base, nozzle, and storage for a complete setup
- **Nozzle Variety** : Available with smooth bore, selectable, or automatic nozzles for operational flexibility
- **High Flow** : Delivers up to 1250 GPM (4500 LPM) for powerful water delivery
- **Safety-Focused** : Equipped with safety inlet(s), a safety tie-down strap, and secure base for safe and stable operation
- **Connection Flexibility** : Swivel inlets and multiple connection options ensure deployment within your response district
- **360° Horizontal Range** : Full rotation capabilities for maximum area coverage

This Package Includes:

- **M-RS4000-BJ** – MasterStream 4000 Selectable Nozzle, Halo, 2.5" BSP Female, 1000/1500/2000/2500/3000/4000 LPM at 7 Bar
- **XFH-2BIC** – SafeTak Base, 2.5" BIC Male, Double Inlet, 1250 GPM
- **XFT-BJ** – CrossFire Monitor Top, 2.5" BSP Male Outlet
- **XF-B** – CrossFire Storage Bracket

Task Force Tips

SKU: XFC-322BICJ3

Specifications

Weight	0.000 lbs
Package	Y
Color	Red
Brand	CrossFire®
Bundle	Monitor Package
Monitor Type	Ground Attack
Bundle Nozzle Type	Selectable
Bundle Nozzle Brand	MasterStream 4000
Monitor Supply Size (Imp)	2.5"
Monitor Supply Size (Met)	65 mm
Monitor Supply Type	BIC Male
Monitor Supply Style	Quick-Connect
Monitor Supply Swivel	Swivel
Monitor Horizontal Range	360°
Monitor Vertical Range	90° – 90°
Monitor Control	Manual
Monitor Supply Inlets	Dual
Monitor Outlet Size (Imp)	2.5"
Monitor Outlet Size (Met)	65 mm
Monitor Outlet Type	BSP Male
Monitor Outlet Style	Male Threads
Monitor Outlet Swivel	Rigid
Max Flow Rate (GPM)	1250 GPM
Max Flow Rate (LPM)	4500 LPM
Bundle Stream Straightener	Integrated
Bundle Storage/Mount Bracket	Included

Task Force Tips

SKU: XFC-322BICJ3

Safety Features	Safety Inlet & Tie Down Strap

Documents

Technical Specifications and Drawings

- XFC-322BICJ3 Item Specification

FOREMOST TECHNICO PVT. LTD.
M-1, Green Park Extn, New Delhi 110016
Tel (011) 43083627, 26196982 | Mob +91 96191 20000 / 98107 16718
sales@foremostsafety.com | www.foremostsafety.com

Task Force Tips (USA)

TASK FORCE TIPS®
FIRE FIGHTING EQUIPMENT

Leader in tactical water delivery solutions

FOREMOST



Handheld Fire Fighter Nozzles



Midmatic
Automatic Fire Nozzle
260-760 LPM



Thunderfog
Selectable Flow Nozzle
360-470-570-750-950 LPM



Quadarfog
Selectable Flow Nozzle
110-230-360-470 LPM

complies with pr EN 15767-1 Standards

Portable Water Monitors

CE




Blitzfire
Oscillating Portable Monitor
400-2000 LPM , Dual Pressure

CE



Crossfire
Portable Water-Foam Monitor
600-4500 LPM , Auto Nozzle



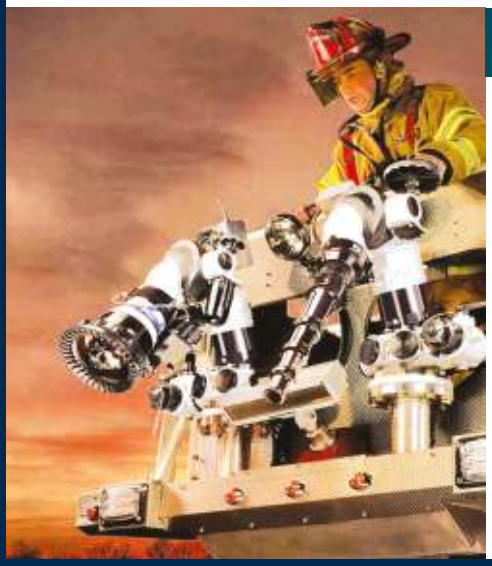

Manual / Remote operated Water - Foam Monitors

CE
Atex version available



Hurricane Monitor
Manual & Remote Control
4500 LPM

CE
Atex version available



Monsoon Monitor
Manual & Remote Control
8000 LPM

FOREMOST TECHNICO PVT LTD
M-1, Green Park Extn, New Delhi-110016, India.

011-26196982 | foremosttechnico@gmail.com | www.foremostsafety.com