Initial Attack Done Safely With Limited Staff . . .



Blitzfire Portable Monitor and Max Force Dual Pressure Nozzle

. . . REALLY !

With a flow rating up to 500 gpm, the TFT Blitzfire Portable Monitor integrates an exclusive safety shutoff system that prevents unintentional movement during critical fireground operations.

The monitor's compact and lightweight design offers a low attack angle and exclusive side valve for complete nozzle man flow control.

To learn more about how you can provide maximum performance and safety to limited staff during initial attack operations, contact your local TFT dealer today.

TASK FORCE TIPS
FIRE FIGHTING EQUIPMENT

TASK FORCE TIPS
Made in USA • www.tft.com

3701 Innovation Way, Valparaiso, IN 46383-9327 USA
US & CN 800.348.2686 • 1.219.462.6161 • fax 1.219.464.7155

© Copyright Task Force Tips, Inc. 2011

LIX-615 April 12, 2011 Rev 00

The New BLITZFIRE® HE

(High Elevation)



The Same 500 gpm Flow, Integrated Slide Valve, Safety Slow Close Shutoff & Low Attack Angle You Expect, But With A Whole Lot...

More Altitude!





New Oscillation Controller Design;

- More Compact and Lightweight
- New Automatic Engage/Disengage Pin Allows Easier Selection
- 20-30-40 Degree Sweep Angle Easier to Select
- New Integrated Sweep Safety System
- Now Available on All Standard and HE High Elevation Blitzfire Models

www.tft.com
800 348-2686
facebook.com/TaskForceTips

TASK FORCE TIPS
FIRE FIGHTING EQUIPMENT

Task Force Tips

SKU: XXC-33HEBICJ







BlitzFire High Elevation Oscillating Portable Monitor +Max-Force Automatic Nozzle Package - 65 mm BICM Swivel Inlet, 65 mm NHM Rigid Outlet, Storage Bracket

The Best Ground Monitor Money Can Buy

Categories: Portable Monitors

The BlitzFire® is an adaptable, high-performance portable water monitor, ideal for fire crews facing limited manpower or challenging firefighting conditions. Delivering up to 500 GPM (2000 LPM) with full control over water flow and attack angles, the BlitzFire® can be used in either attended or unattended mode. Its exclusive safety shutoff valve ensures operation under the safest possible conditions, while its compatibility with various nozzles and foam systems adds versatility to its use. Whether you need to adjust your stream angle to reach high or low locations, the BlitzFire® is a reliable, efficient solution that maximizes fireground capabilities.

Key Features:

- Flow Rate: Flows up to 500 GPM (2000 LPM) for powerful water delivery
- Safety Shutoff Valve: Automatically shuts off water in case of unintentional monitor movement
- Adjustable Attack Angles: 10°-46° for standard models; up to 86° for high elevation units
- Slide Valve Control: Provides complete control with six distinct detent positions for precise stream

management
- Foam Compatibility: Compatible with various foam systems for enhanced fire suppression
- Optional Oscillation: Covers a range of 20°, 30°, or 40° without manual adjustment for effective cooling and exposure protection
- Carbide-Tipped Legs: Offers enhanced stability on uneven terrain
- Compact Storage: Easily mounted or stored in apparatus compartments for rapid deployment

This Package Includes:

XX241A-HE – BlitzFire® High Elevation with Oscillation

- 2.5” (65mm) BIC Male Inlet
- 2.5” (65mm) Male Outlet
- Oscillation via water-driven turbine
- Horizontal Movement: 20° left and right of center
- Vertical Movement: 10°-46° above horizontal
- Turbulence-free slide valve
- Safety Shut-Off Valve

MD12A – Max-Force Nozzle:

- 100/55 PSI (7/4bar) Dual-Pressure Nozzle
- Flow Capacity: 100-500 GPM (400-2000 LPM)
- Stream: Straight Stream to a 120° wide fog

XX-B – Storage Bracket

Task Force Tips

SKU: XXC-33HEBICJ

Specifications

Weight	0.000 lbs
Package	Y
Color	Blue
Brand	BlitzFire®
Bundle	Monitor Package
Monitor Type	Ground Attack
Bundle Nozzle Type	Automatic
Bundle Nozzle Brand	Max-Force
Monitor Supply Size (Imp)	2.5"
Monitor Supply Size (Met)	65 mm
Monitor Supply Type	BIC Male
Monitor Supply Style	Quick-Connect
Monitor Supply Swivel	Swivel
Monitor Horizontal Range	±20°
Monitor Vertical Range	10° – 86°
Monitor Special Features	High Elevation Oscillating
Monitor Control	Manual
Monitor Supply Inlets	Single
Monitor Outlet Size (Imp)	2.5"
Monitor Outlet Size (Met)	65 mm
Monitor Outlet Type	NH Male
Monitor Outlet Style	Male Threads
Monitor Outlet Swivel	Rigid
Max Flow Rate (GPM)	500 GPM
Max Flow Rate (LPM)	2000 LPM
Bundle Storage/Mount Bracket	Included

Task Force Tips

SKU: XXC-33HEBICJ

Monitor Valve Type	Slide Valve
Safety Features	Safety Shutoff & Tie Down Strap

Documents

Technical Specifications and Drawings

- XXC-33HEBICJ Item Specification

FOREMOST TECHNICO PVT. LTD.
M-1, Green Park Extn, New Delhi 110016
Tel (011) 43083627, 26196982 | Mob +91 96191 20000 / 98107 16718
sales@foremostsafety.com | www.foremostsafety.com

Task Force Tips (USA)

TASK FORCE TIPS®
FIRE FIGHTING EQUIPMENT

Leader in tactical water delivery solutions

FOREMOST



Handheld Fire Fighter Nozzles



Midmatic
Automatic Fire Nozzle
260-760 LPM



Thunderfog
Selectable Flow Nozzle
360-470-570-750-950 LPM



Quadarfog
Selectable Flow Nozzle
110-230-360-470 LPM

complies with pr EN 15767-1 Standards

Portable Water Monitors

CE




Blitzfire
Oscillating Portable Monitor
400-2000 LPM , Dual Pressure

CE



Crossfire
Portable Water-Foam Monitor
600-4500 LPM , Auto Nozzle



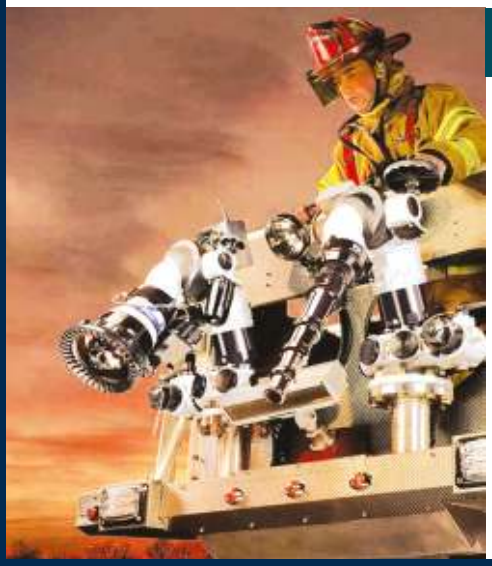

Manual / Remote operated Water - Foam Monitors

CE
Atex version available



Hurricane Monitor
Manual & Remote Control
4500 LPM

CE
Atex version available



Monsoon Monitor
Manual & Remote Control
8000 LPM

FOREMOST TECHNICO PVT LTD
M-1, Green Park Extn, New Delhi-110016, India.

011-26196982 | foremosttechnico@gmail.com | www.foremostsafety.com