Zero to 1250 GPM in 30 Seconds . . .



Monsoon Remote Controlled Monitor

. . . REALLY !

With only 6 psi loss at 1250 GPM flows, the remotely controlled Monsoon Monitor from Task Force Tips provides your limited crew with a powerful masterstream that can be placed in service quickly and safely.

The Monsoon, when combined with the Extenda-Gun telescoping waterway and handheld radio frequency controller, dramatically improves the fire flow performance of any apparatus.

To learn more about how you can integrate amazing new capabilities into your apparatus, contact your local TFT dealer today.

TASK FORCE TIPS
FIRE FIGHTING EQUIPMENT

TASK FORCE TIPS
Made in USA • www.tft.com

3701 Innovation Way, Valparaiso, IN 46383-9327 USA
US & CN 800.348.2686 • 1.219.462.6161 • fax 1.219.464.7155

© Copyright Task Force Tips, Inc. 2011

U.S. & Canada (800) 348 2686 www.tft.com
24 Hour Service Team: (800) 854 6864
TASK FORCE TIPS 3701 INNOVATION WAY, VALPARAISO, IN 46383-9327 MADE IN USA

QR US WITH YOUR CAMERA PHONE

(Quick Response Applications are available from your smart phone company.)

MONSOON RC SERIES


Visit www.tft.com/FE12 to see a complete video overview of the Monsoon Remote Controlled Monitor.



MONSOON RC

Remote Controlled Deck Monitor - Up To 2000 GPM *Designed for Pumper Applications*


The Monsoon RC for pumper installations is an electric remote controlled monitor that has all the benefits of the Monsoon monitor with the addition of powered operation. It has a greater horizontal sweep angle than the RC model for Ladder or Platform installations. Designed for 12 VDC or 24 VDC operation, selection is automatic. The Monsoon RC comes with a factory installed control panel mounted on the monitor for controlling horizontal rotation, elevation, nozzle pattern and programmable PARK and Oscillate. The motor control circuits are factory installed on the monitor and use position encoders and current limiting to protect the drive train at the ends of travel. Unit comes with 30 feet of ultra-flexing robotics cable already wired to the monitor so installation effort is minimized. Cable has only four conductors (two for power and two for communications), further easing the installation effort. Cable is enclosed in a unique wire guide that allows 450° of horizontal travel (225° either side of a center position), which is far more reliable than slip rings or coil cords. Knobs for manual override are provided on the horizontal rotation and elevation drive. TFT's Master ERP nozzles plugs into the factory installed nozzle power wire. Electric drives and control box are waterproof. Main waterway made from hardcoat anodized ANSI 356-T6 aluminum. Silver powder coat finish inside and out. Standard outlet is 3.5" NH (90 mm) rigid male thread. Other outlets are available. RC Monitor delivered with wireless antenna installed.

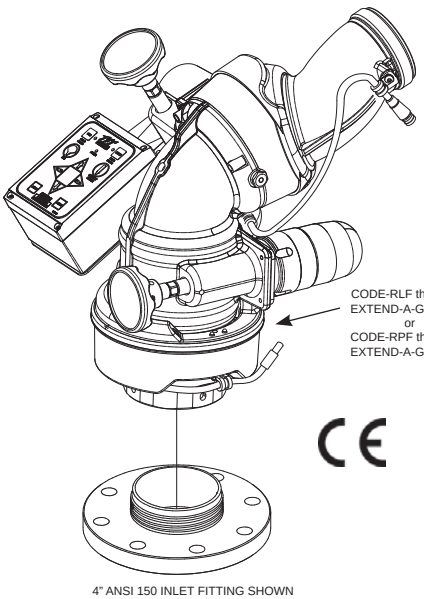

4" ANSI 150 INLET FITTING SHOWN
OTHER INLET FITTINGS SIMILAR

Y4-E11A
37.0 lb (16.8 kg)

SAMPLE PART NUMBER
Specify Inlet and Outlet by number from chart

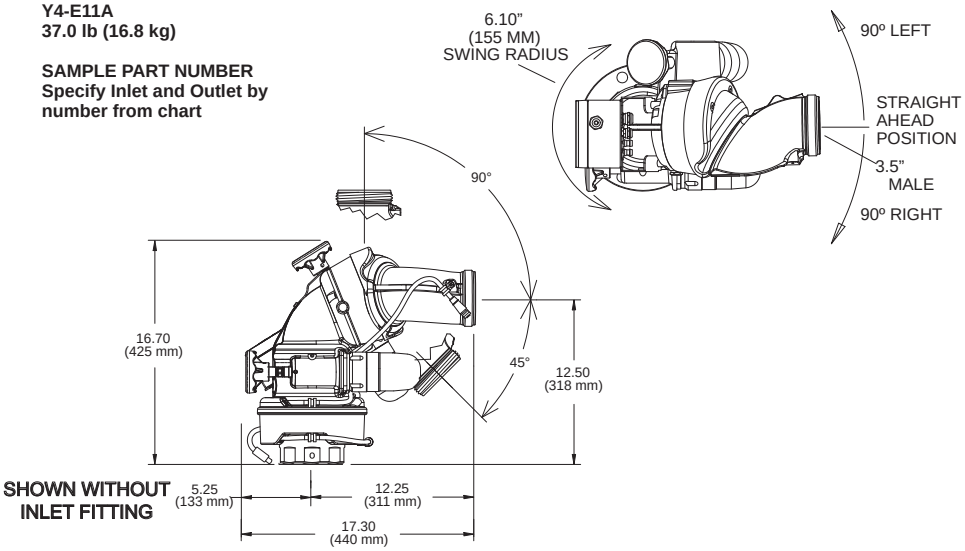

Y4-			A
Actuation E) Electric M) Manual T) Tiller	Inlet **1)** 3" ANSI 150 **2)** 4" ANSI 150 **3)** 6" ANSI 150 **4)** DN80, PN16 **5)** DN100, PN16 **6)** 3" NPT Female **7)** 4" NPT Female **8)** 3" BSP Male 9) 4" BSP Male L) TFT CODE-RLF* P) TFT CODE-RPF* Q) 4.5"NH Quick Connect for VUM R) 4.5"NH Quick Connect with 4" ANSI 150 S) 4.5"NH Quick Connect with 4" NPT female T) 4.5"NH Quick Connect with CODE-RLF* U) 4.5"NH Quick Connect with CODE-RPF*	Outlet 1) 3.5"-6 NH Male 2) 3.5"-11 BSP Male 3) 3.5"-8 NPSH Male 4) 4.0"-11 BSP Male 9) Special

*TFT CODE-RLF Fits Extend-A-Gun RC3
*TFT CODE-RPF Fits Extend-A-Gun RC4

Task Force Tips (USA)

TASK FORCE TIPS®
FIRE FIGHTING EQUIPMENT

Leader in tactical water delivery solutions

FOREMOST



Handheld Fire Fighter Nozzles



Midmatic
Automatic Fire Nozzle
260-760 LPM



Thunderfog
Selectable Flow Nozzle
360-470-570-750-950 LPM



Quadarfog
Selectable Flow Nozzle
110-230-360-470 LPM

complies with pr EN 15767-1 Standards

Portable Water Monitors

CE




Blitzfire
Oscillating Portable Monitor
400-2000 LPM , Dual Pressure

CE



Crossfire
Portable Water-Foam Monitor
600-4500 LPM , Auto Nozzle



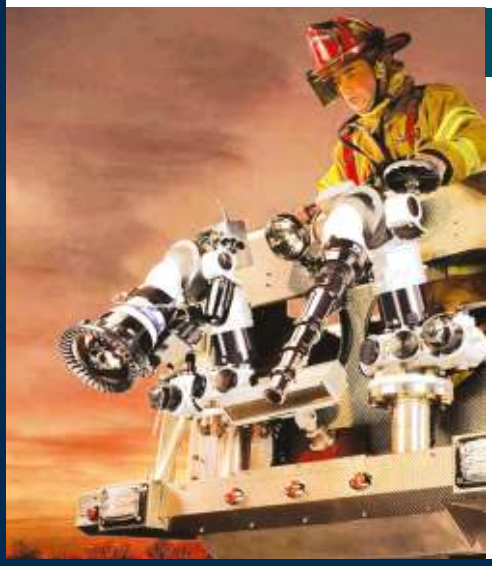

Manual / Remote operated Water - Foam Monitors

CE
Atex version available



Hurricane Monitor
Manual & Remote Control
4500 LPM

CE
Atex version available



Monsoon Monitor
Manual & Remote Control
8000 LPM

FOREMOST TECHNICO PVT LTD
M-1, Green Park Extn, New Delhi-110016, India.

011-26196982 | foremosttechnico@gmail.com | www.foremostsafety.com